


Electroplating ABS, POLYLAC[®] PA-726M

Processing Conditions

- A. Pre-drying 80 ~ 85 °C x 3 ~ 4 hrs
depending on a) Humidity
b) Ratio of reground resin
c) Storage conditions
- B. Barrel Setting Profile

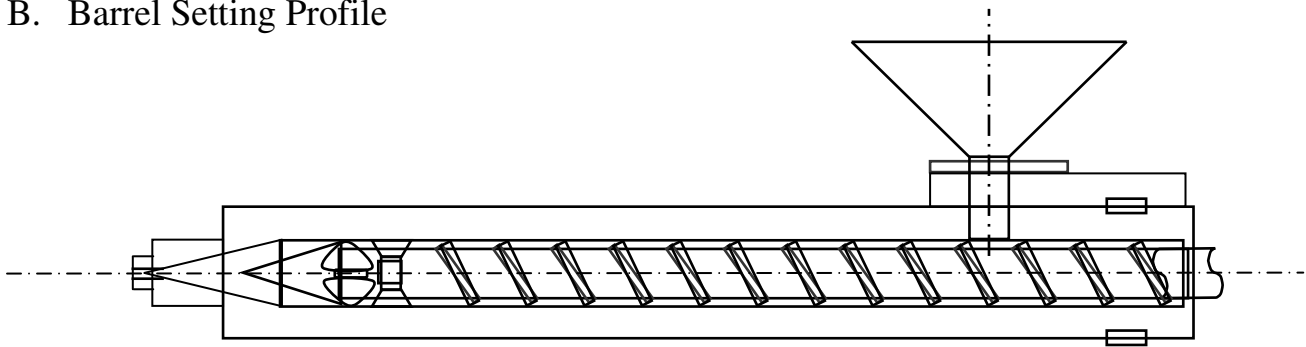

MAX(°C)	230	230	220
MIN(°C)	190	190	180

- C. Mold Temperature 30~70 °C
depending on a) Thickness
b) Dimension
c) Gate and runner system

NOTE :

1. Keep the resin from dust and contamination during handling and production.
2. Do not retain the hot melt at the barrel for a long time between injection cycles.
3. Temperature setting of manifold system should not exceed 240 °C to avoid melt from degraded.
4. For further information, please contact your local agent or call via +886-6-2665555.